

Power Output Ratings

50 Hz / 400 V

Standby Power (ESP)	kVA	275
	kW	220
Prime Power (PRP)	kVA	250
	kW	200


Engine

Manufacturer		PERKINS
Origin		U.S.A.
Model		1306C-E87TAG6
No of Cylinder / Configuration		6 - INLINE
Displacement	lt	8,7
Bore / Stroke	mm	116,6 / 135,9
Compression Ratio		16,9:1
Aspiration		Turbocharged and Air-to-Air Charged Cooled
Governor Type		ELECTRONIC/ECM
Cooling System		WATER
Coolant Capacity	lt	37,2
Lubrication Oil Capacity	lt	28,3
Electrical System	VDC	24
Speed / Frequency		1500 rpm / 50 Hz
Engine Gross Power	kWm	246
Fuel Consumption	lt/h	110 %
		100 %
		75 %
		50 %
Exhaust Outlet Temperature	°C	528
Exhaust Gas Flow	m³/min	44,5
Combustion Air Flow	m³/min	16,4
Cooling Air Flow	m³/min	375

Alternator

Manufacturer		STAMFORD
Origin		INDIA
Model		HCI444C
No of Phase		3
Power Factor		0,8
No of Bearing		SINGLE
No of Poles		4
No of Leads		12
Voltage Regulation (Steady State)		± %1
Insulation Class		H
Degree of Protection		IP 23
Excitation System		AVR (Automatic Voltage Regulator), Brushless
Connection Type		STAR
Total Harmonic Content (No Load)		< %2
Frequency	Hz	50
Voltage Output	VAC	230 / 400
Rated Power (Standby)	kVA	275
Efficiency	%	92,2

	W x L x H (mm)	Weight (kg)	Fuel Tank (lt)	Noise dB(A)
Canopied	TBA x TBA x TBA	TBA	TBA	TBA
Open Skid	TBA x TBA x TBA	TBA	TBA	TBA


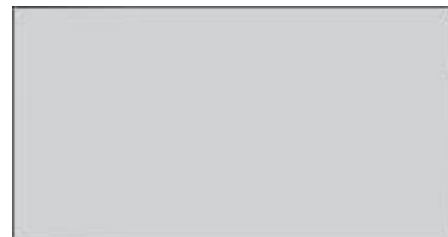


Standby Power

Standby power is defined as the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 500 hours of operation per year under average of 70% load. Overloading is not permissible.

Prime Power

Prime power is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load. Average load should be 70%. The generator can be overloaded 10% for 1 hour per 12 hours.

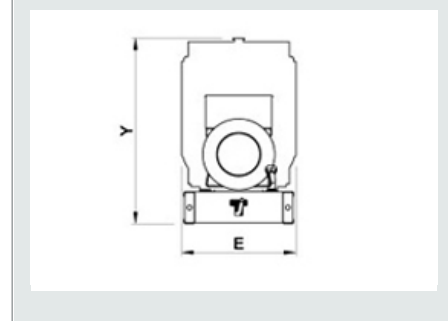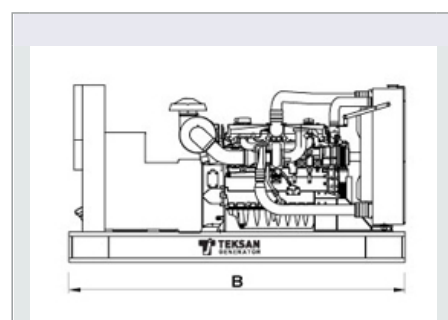

- Technical information and values are according to ISO8528, ISO3046, NEMA MG-1.22, IEC 60034-1, BS 4999-5000, VDE 0530 standards.
- Producing with ISO9001, ISO14001, OHSAS18001, TSE, CE standards.
- All information given in this leaflet is intended for general purposes only. Due to a policy continuous improvement Teksan reserves the right to amend details and specifications without notice and all information given is subject to the Teksan's current condition of sales.

TBA: To Be Ask

TBD: To Be Determined

NA: Not Available

N/A: Not Applicable

TTD275PE5S0612-EN

www.teksangenerator.com

